


CAUTION

RISK OF ELECTRIC SHOCK
DO NOT OPEN


CAUTION : TO REDUCE THE RISK OF ELECTRIC SHOCK,
DO NOT REMOVE COVER
NOT USER SERVICEABLE PARTS INSIDE
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL

Dimensions

Part name & Dimension

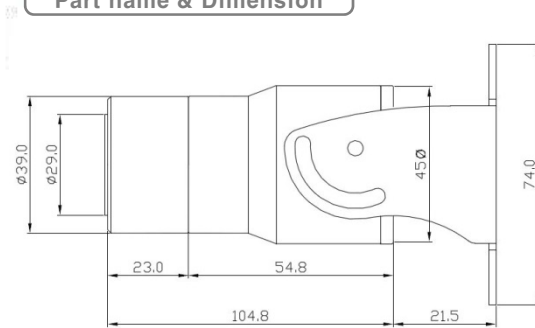

Installation

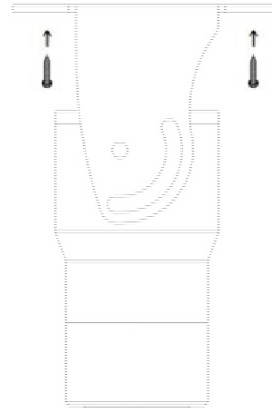

1. Adjust view angle using the bracket hole before the mounting screws are fixed.

2. Loosen up the screws of the bracket for adjusting view angle and tighten up the bracket on the wall or ceiling

Features

- 1/3" 960H Sony Super HAD II CCD
- 700 TV lines of Resolution
- AISI 316 Grade Stainless steel body & 3-axis bracket
- Anti-salt & Anti-germ
- 15pcs of white LEDs
- Available brightness of White LEDs by switch
- 3.6mm fixed lens
- Compact size
- Low illumination camera
- Smart 3D-DNR
- SENS-UP (x8, default)
- Waterproof / IP-68 compliant
- DC12V


Specifications

TV System	NTSC	PAL
Image pick-up Device	1/3" Sony Super HAD II Color CCD (960H)	
Number of Pixels	H	976
	V	582
Scanning Frequency	H	15.734KHz
	V	59.94Hz
Horizontal Resolution	Color	700 TV Lines
Scanning System	2:1 Interlace	
S/N Ratio	More than 52dB (AGC off)	
Min. Sensitivity	0.1 Lux at F : 1.2	
	0.001 Lux at SENS-UP on	
Scanning System	2:1 Interlace	
Gamma Correction	0.45 Approx.	
Gain Control	Automatic	
Video Output	Composite Video 1.0Vp-p/75Ω	
Lens	Fixed 3.6mm Lens	
Power Source	DC12V 300mA	
Power Consumption	1.0 Watt	
Operating Temp.	-10°C ~ +50°C	
Dimensions (mm)	Φ49 X 109(L)	
Weight/g	600	

Accessories



Cable

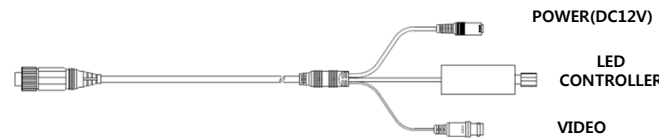

CAUTION! Please use regulated power supply DC12V 300mA
Reverse Polarity Protection

All specification and pictures are subject to change without notice to improve quality.