




# TIB-2805PX

## HDTVI, HDSDI, Analog Varifocal Bullet

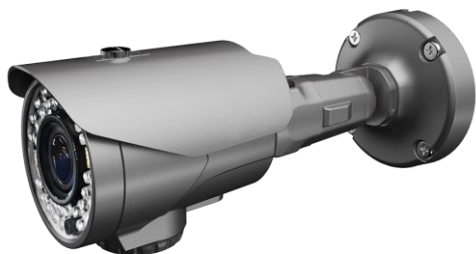

### Features

- AIB-IR™, Heater & Thermostat Module
- Patent Design 5-Axis Bracket
- 2.8-12mm / 6-50mm Megapixel Lens
- Optional IDP™ Isolation Dual Power
- Dual HD Video Output

### More Features

Available in Grey or White. Add “-G” or “-W” to the end of part number.

Specification	TIB-2805PX
Image Sensor	1/2.9" 2.1MP CMOS Image Sensor
Effective Pixel	1920 (H) × 1080 (V) = 2.4M
Scanning System	Progressive
Synchronization	Internal
Horizontal Resolution	1080P
Video Output	HD-TVI, EX-SDI/HD-SDI, CVBS (OSD Selectable)
S/N (Y Signal)	More Than 52dB
Minimum Illumination	0.02Lux (SENS-UP X32)
Iris Adjustment	ALC / ELC
Lens	6~50mm MP DC Auto Iris Varifocal Lens (ICR)
Electronic Shutter	Auto (1/30~1/60,000) Auto (1/25~1/60,000) FLK
OSD Language	ENG / CHN / CHN[S] / JPN / KOR
Backlight Compensation	Off / HLC / BLC / WDR
Day & Night	Color / BW / EXTERN / Auto
D-WDR	Off / Low / Middle / High
Auto Gain Control	Level (0~20) Adjustment
White Balance	Auto / Autodext / Preset / Manual
Privacy Masking	On / Off (Programmable 16 Zones)
DNR	Off / Low / Middle / High
Smart IR	Anti-Set (0~20) Adjustment
LSC	On/Off
Gamma	0.45 / 0.5 / 0.55 / 0.6 / 0.65
Defog	On/Off
Digital Zoom	On/Off (X1 ~ X8.0)
Dead Pixel Compensation	Live DPC / DPC Set
SENS-UP	Off / X2~X32
Motion	4 Area
Digital Effect	Off / V-Flip / Mirror / Rotate
Communication	UTC
IR LED	AIB-IR™ : 8PCS (250ft)
Input Voltage	DC 12V / AC 24V Dual Voltage
Power Consumption	DC IR Off : 210mA (Max) / DC IR On : 650mA (Max) AC IR Off : 200mA (Max) / AC IR On : 550mA (Max)
Operating Temperature/Humidity	-22°F~-122°F (-30°C~50°C) / Max 90% RH