



MIP-8125

8 Megapixel (4K) PTZ Camera

4K
ULTRA HD

Features

- 8MP Resolution (4K)
- Multi-Streaming
- 25 x Optical Zoom
- IP66 Rated / IK10
- Smart IR up to 151 ft (50m)
- Support for Micro SD Memory Card (256GB Max)

More Features


PTZ Range: 360° Endless; Tilt 5° ~ 90° (Auto Flip)

True Day Night, AWB, BLC, DWDR, 3DDNR

Supports ONVIF

Smart tracking human / vehicle

Ceiling or Wall Mount Included (-c / -w)

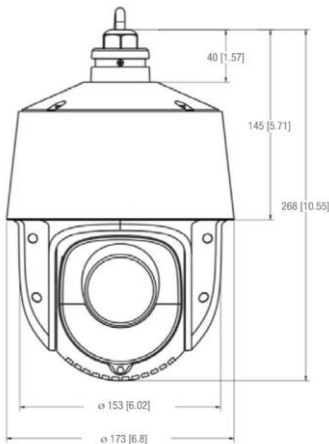

Specification	MIP-8125
Image Sensor	1/2.8" SONY Progressive Scan CMOS
Min. Illumination	0 Lux
S/N Ratio	≥ 52dB
Effective Pixels	3840 x 2180
Lens	25 x Optical Zoom F=4.8-120mm
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Resolution	8MP (3840 X 2180) 3MP (2048x1536), 1080P (1920x1080),
Frame Rate	1 ~ 30 FPS (25FPS)
Multi-Stream	Support Main, Sub, Third stream
Protocol	TCP/IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PPPoE
Storage	Network Remote storage
Day & Night	True
Noise Reduction	DNR
Preset Speed	Pan: 360° Endless Rotation / Tilt: 0~ 93° (Auto Rotation)
Smart Alarm	Motion Alarm, Sensor Alarm
Preset	255
PTZ Mode	Cruise: 8, Track: 4, Scan: 2
Auto Flip	Support
Time Task	8
IR LEDs	2 Super Hi Power AIB IRs (492ft) 150M
Weatherproof Rating	IP66 / IK10
Network	RJ45
Max. User Access	16 Users
Memory Slot	Micro SD 256gb max.
RS485	RS485 x 1
Alarm	1CH in / 1 CH out
Smartphone	iPhone, iPad, Android, Windows Phone
Web Browser	IE 7+, Chrome 18+, Firefox 5.0+, Safari 5.02+
Audio	MIC Input x 1, MIC Output x 1
Power Supply	DC 12V / PoE + 802.3 at class 3
Power Consumption	24 W (Max. 30W, IR on)
Dimensions	Φ9.7in x 6.8in (247mm x 173mm)
Operating Temperature	-40°~140° F (-40°~60° C) & Humidity > 90% RH