

# MIN-8128 8 MP H.265 IP PANORAMIC CAMERA



## Features

- 8 Megapixel Panoramic
- H.265+ / H.265 / H.264+ / H.264
- Dual 2.8mm Fixes Lens
- Built-in Micro SD Slot
- Ip 67 ingress Protection

### More Features

H.265+ / H.265 / H.264+ / H.264 / MJPEG coding

Max. Resolution 8MP ( 4640 x 1760 )

ICR auto switch, true day / night vision

3D DNR, WDR, HLC, BLC, smart IR, etc.

Built-in micro SD card slot, up to 256GB


IP 67 ingress protection

Support TRIPLE streams

Support remote monitoring via smart phones & tablet PCs with iOS and Android OS

Intelligent analytics

ICR auto switch, true day / night vision

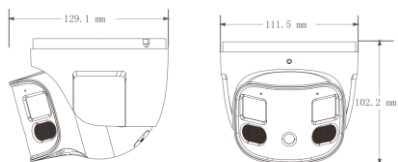

Specification	MIN-8128
Image Sensor	1 / 2.7" Progressive Scan CMOS x 2
Image Size	(4640 x 1760)
Electronic Shutter	1 / 1' s – 1 / 100000 s
Iris Type	Fixe Iris
Lens	2.8mm # F1.6
Focus	Fixed
Lens Mount	M12
Day & Night	ICR
WDR	120 dB
BLC	Support
HLC	Support
Digital NR	Support
Angle Adjustment	Pan: 0-360 / Tilt 0-75 / Rotation 0-360
Video Compression	Main Stream H.265+, H.265, H.264+, H.264 Sub Stream & Third H.265+, H.265, H.264+, H.264, MJPEG
H.265 Compression Standard	Main Profile @ Level 4.1 High Tier
Resolution	8MP (4640x1760) 6mp (3632x1632 ) 4MP (3200x1200), 2MP (2304x864, 2048x768, 1600x608, 1200x448, 960x368, 640x240
Main Stream	60Hz: 8MP/6MP/4MP/2MP 1-30fps
Sub Stream	60Hz: 2048x768 / 1600x608 / 1200x448 1-25fps
Bit Rate	64Kbps- 10 Mbps
Bit Rate Type	VBR/ CBR
Network	RJ45
Audio	1 Ch audio input / 1 Ch built-mic
Storage	Built-in Miro SD slot Up to 256GB
Power Supply	DC 12V / PoE
Power Consumption	< 10.2W
Operating Temp	- 30 °C ~ 60 (-22 °C °F~140°F);Humidity: less than 95 %
Dimension	111.5mm x 102.2mm / 4.3in x 4.02in
Certificate	CE, FCC
Weight	Approx 0.719KG / 1.58 Lbs