



MRV-80C2E-WRTS Trouble Shooting Kit

Quick Guide

Connect the monitor to the power supply

- Identify the Positive (+) and Negative (-) on the power supply terminal
- Identify the Positive (+) and Negative Cables from the monitor.
- Red cable – Positive
- Black cable - Negative
- Screw in the cable into the terminal and tighten



Rear top of the
monitor make sure
to screw the
wireless antennas





On the camera remove the red side cap



Screw in the
wireless
antenna into
the antenna
terminal on the
camera




Power On Camera

- Confirm that the camera is fully charge
- Press and hold the Power button on the side of the camera




Power On the Monitor

- Press and the power button on the monitor
- Wait until the screen turns on and the power icon lights up

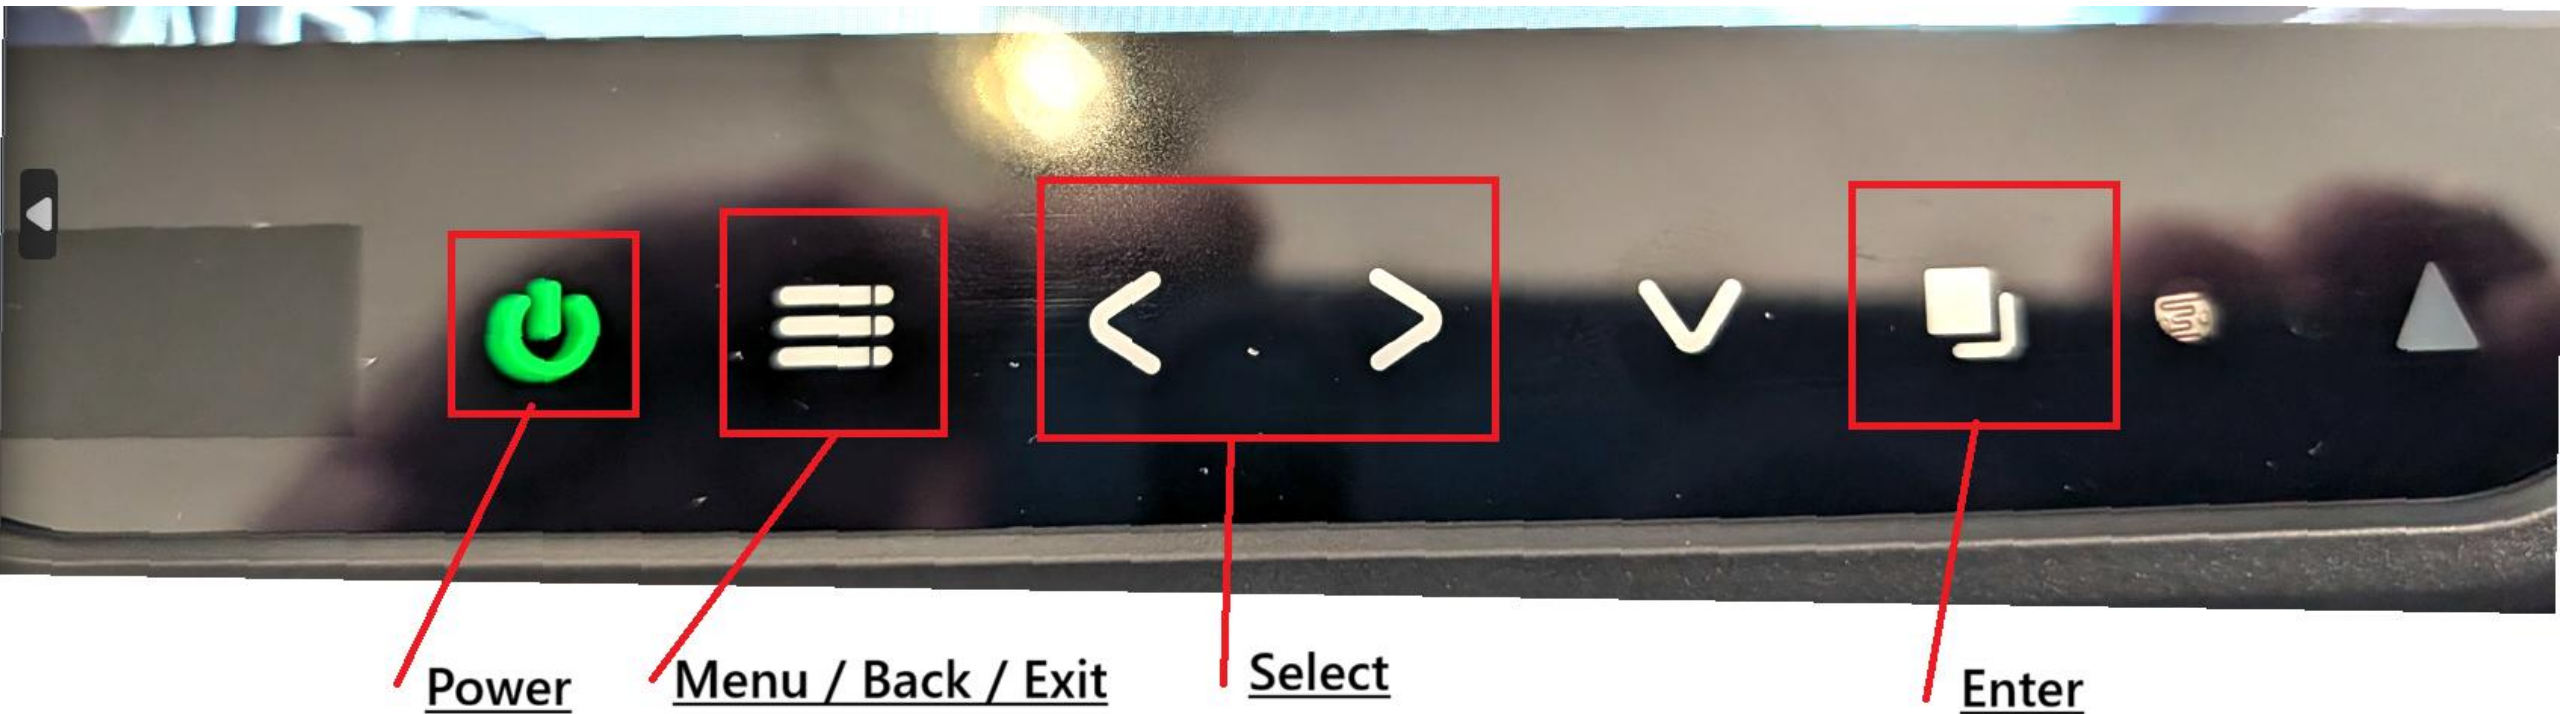


Pair the camera


- Once Screen is powered ON
- Press the Menu

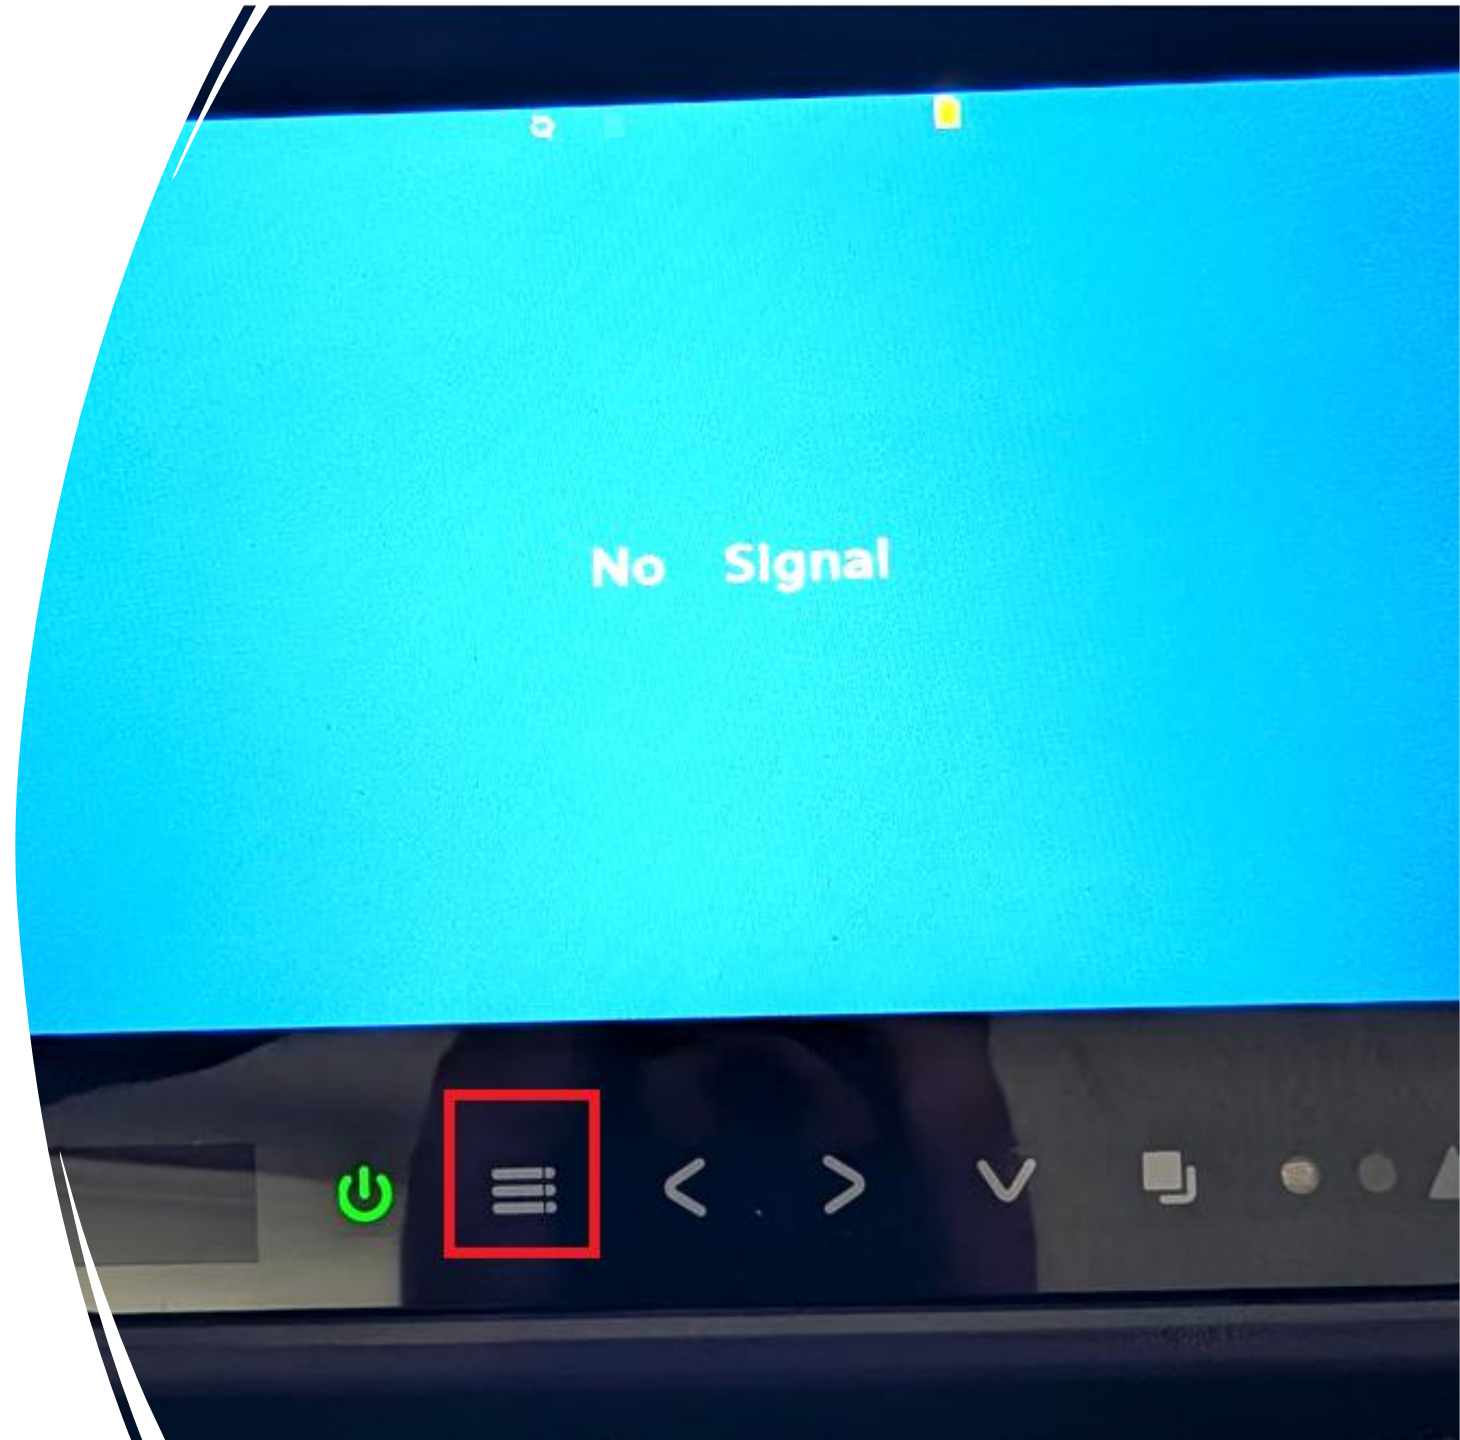

-
- Select the Pairing Icon
 - Once its selected press Enter on the touch pad

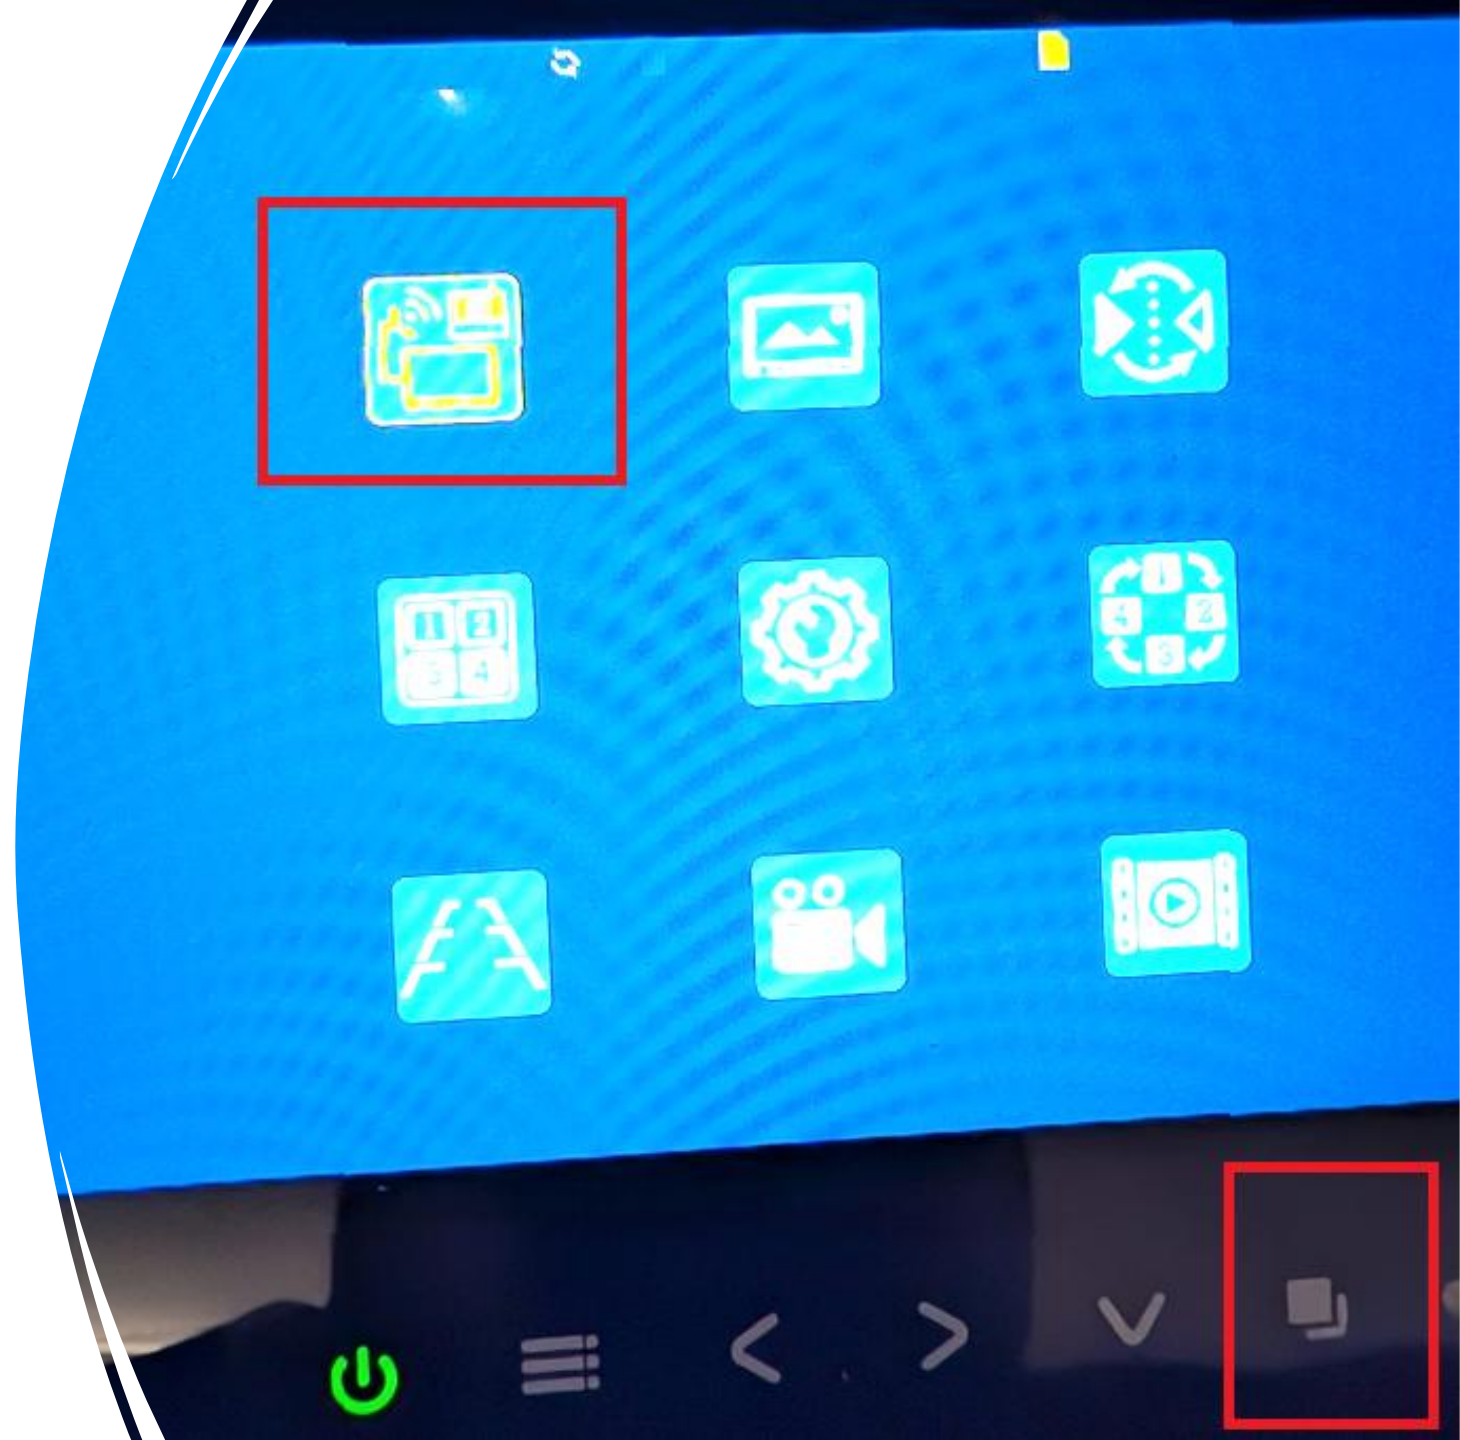

-
- Make sure camera is powered ON
 - Wait until the image is displayed

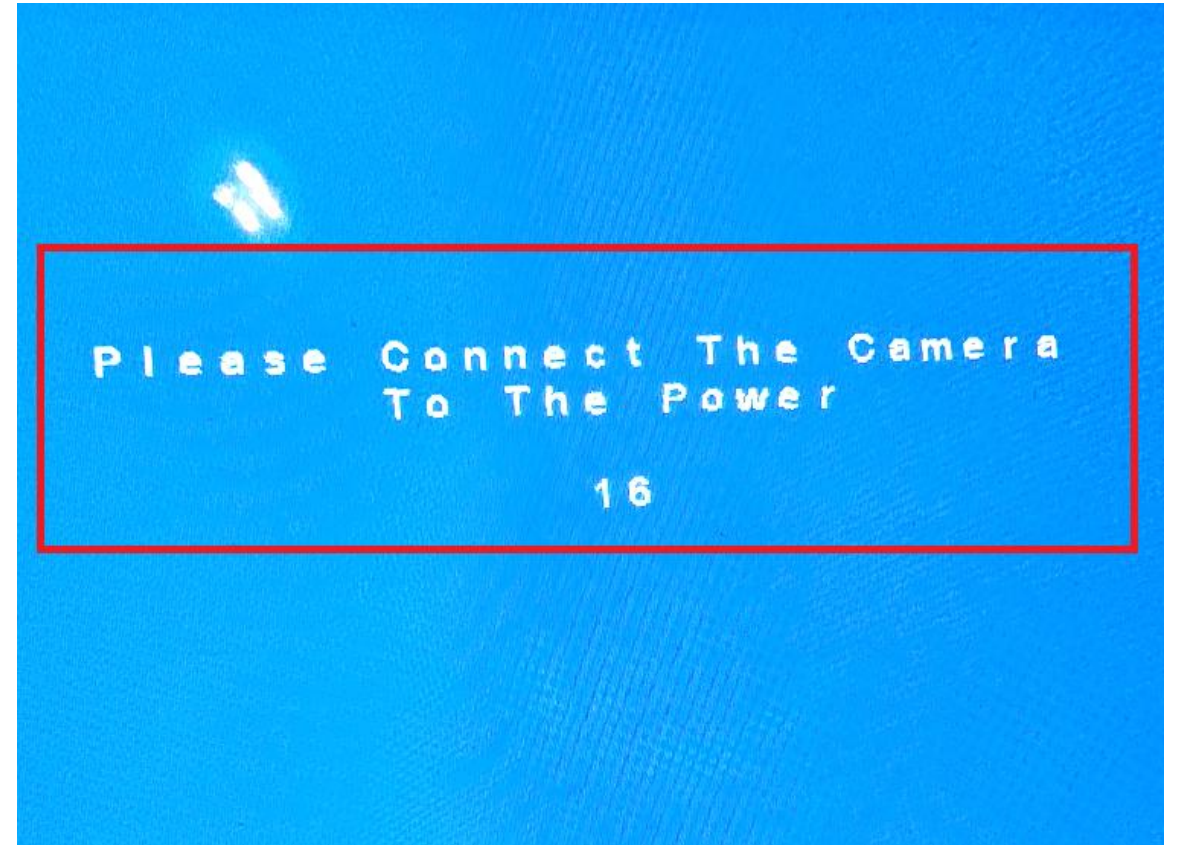


Now the cameras
are fully paired




Start the recording process


- Press Menu
- Use the arrow to select the recording icon
- Confirm “record” is selected
- Press Enter

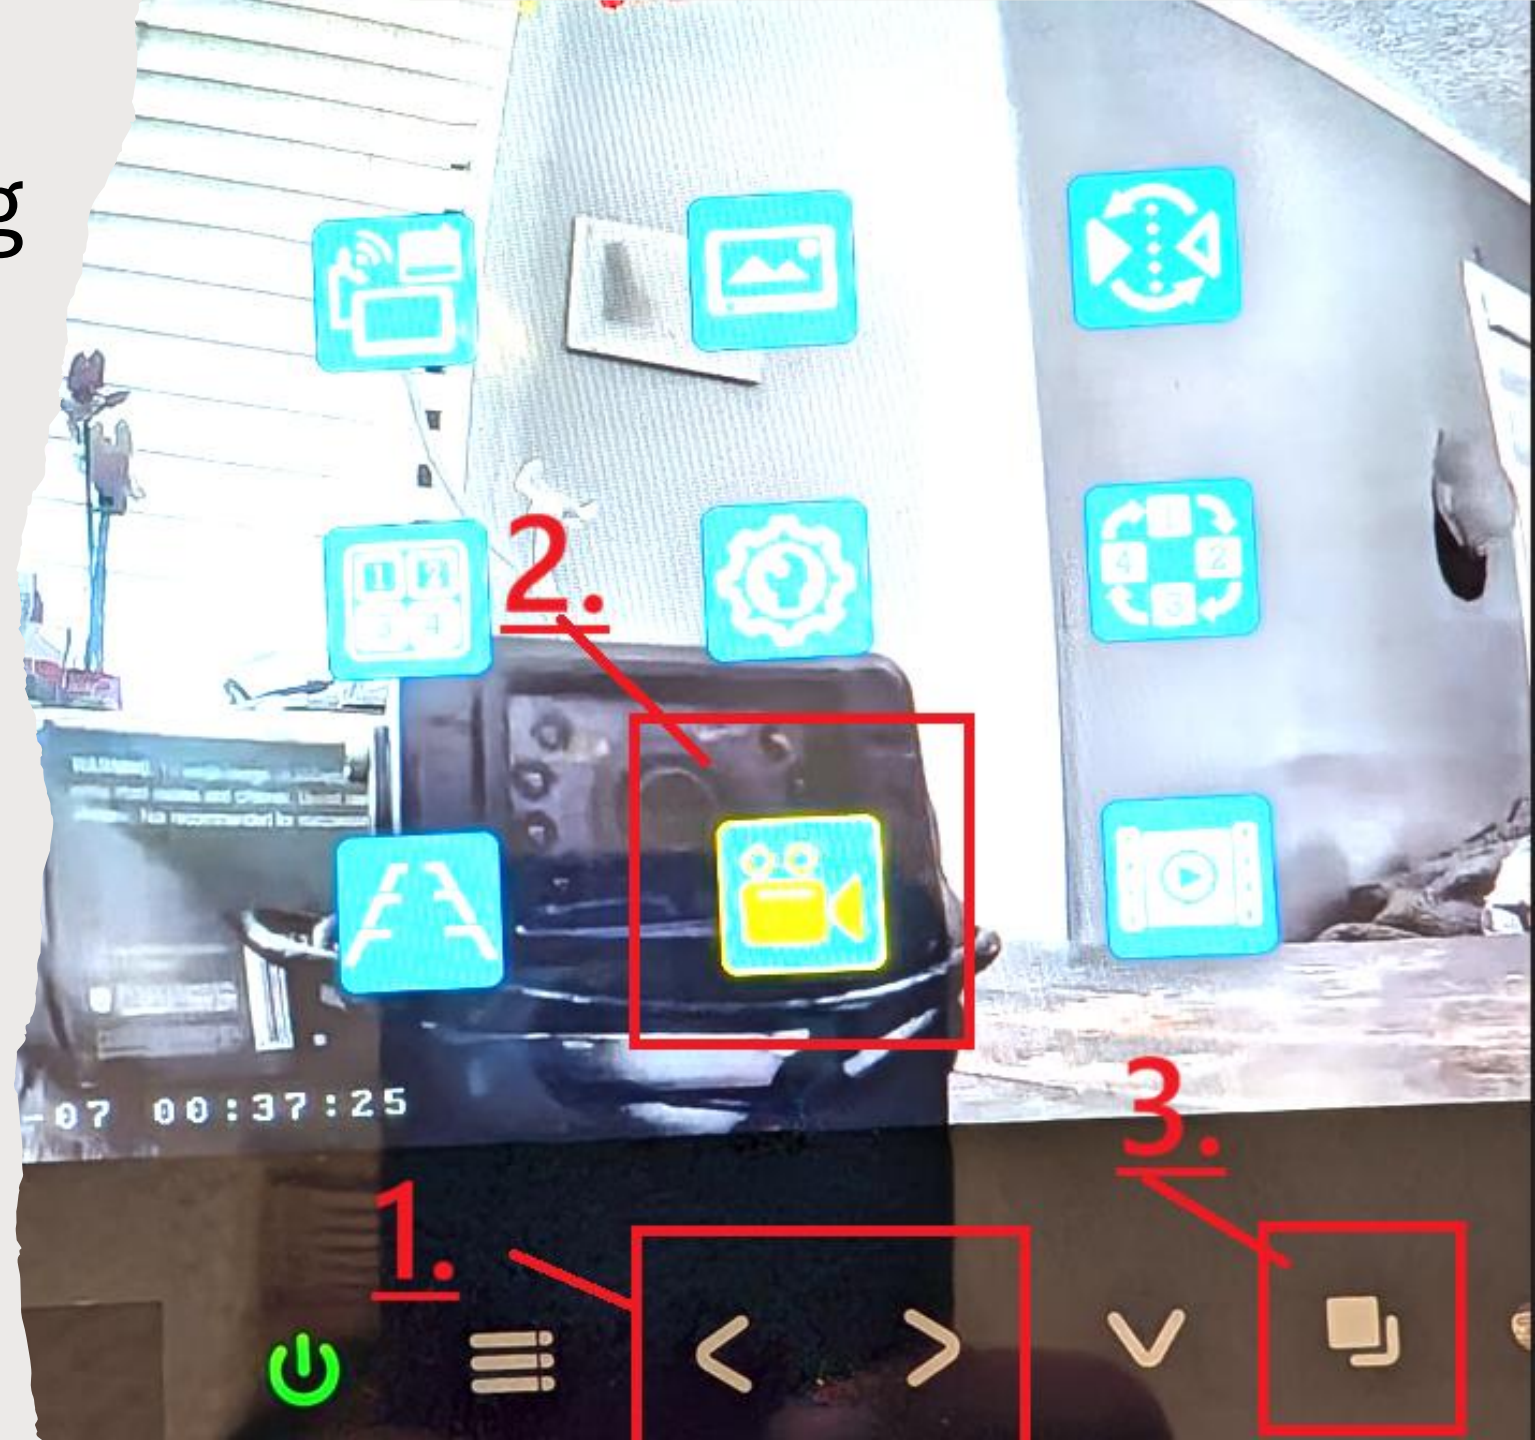

Confirm Recording

- Make sure the recording is set to ON
- Make sure Recording Recycle is also ON
- (recording recycle feature means that once the storage is full it will start overwriting over the oldest video clips.)

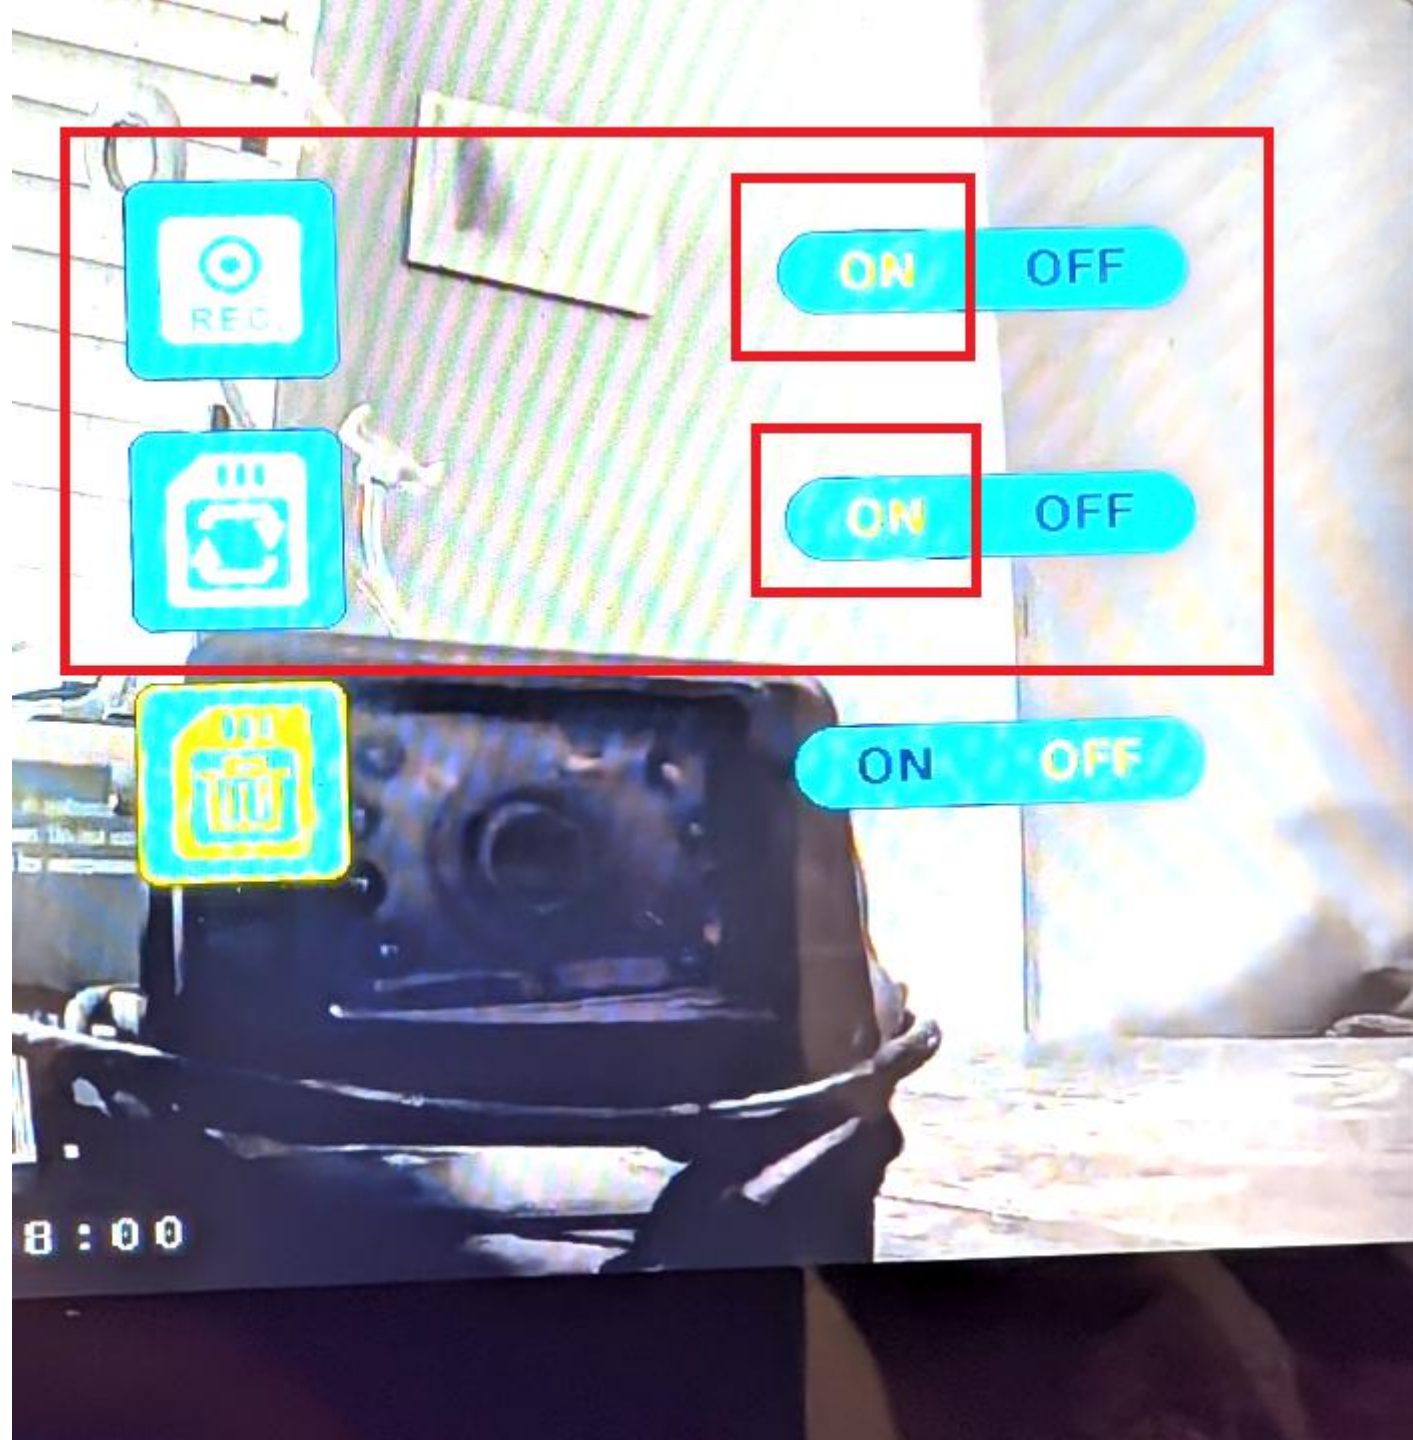

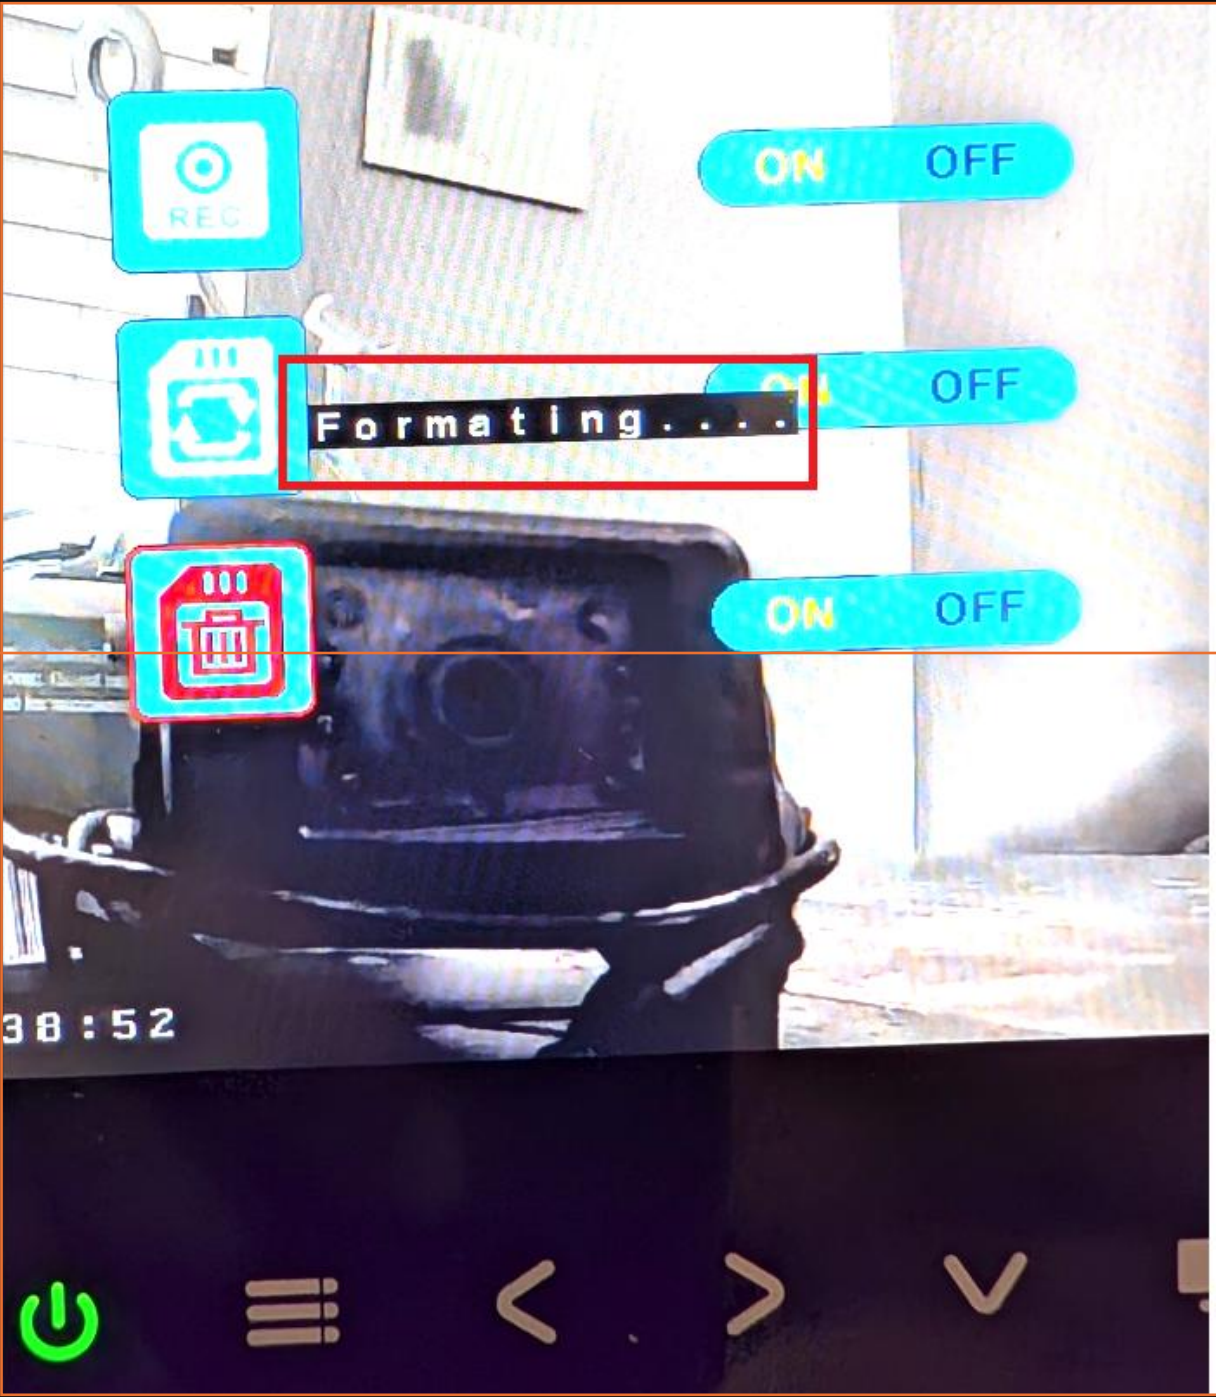

Select the Format Icon

Turn it ON

Wait until Formatting complete


Once complete now it's ready to start recoding

Now it's recording




Video Playback

- 1 - Press Menu
- 2 - Select Play Back
- 3 - Press Enter

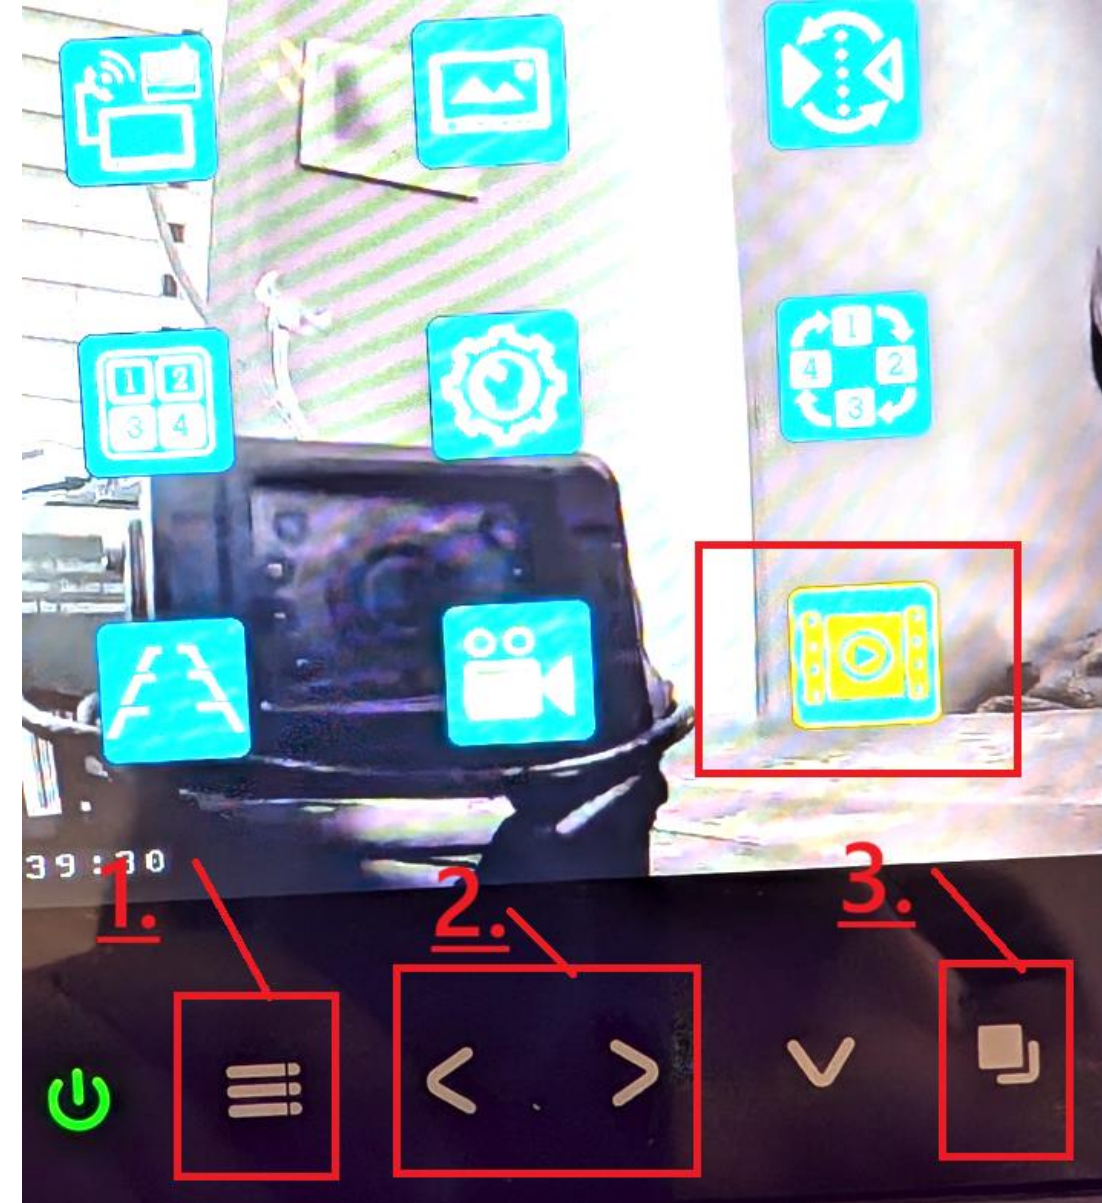

Video Clips

- It will show multiple video clips

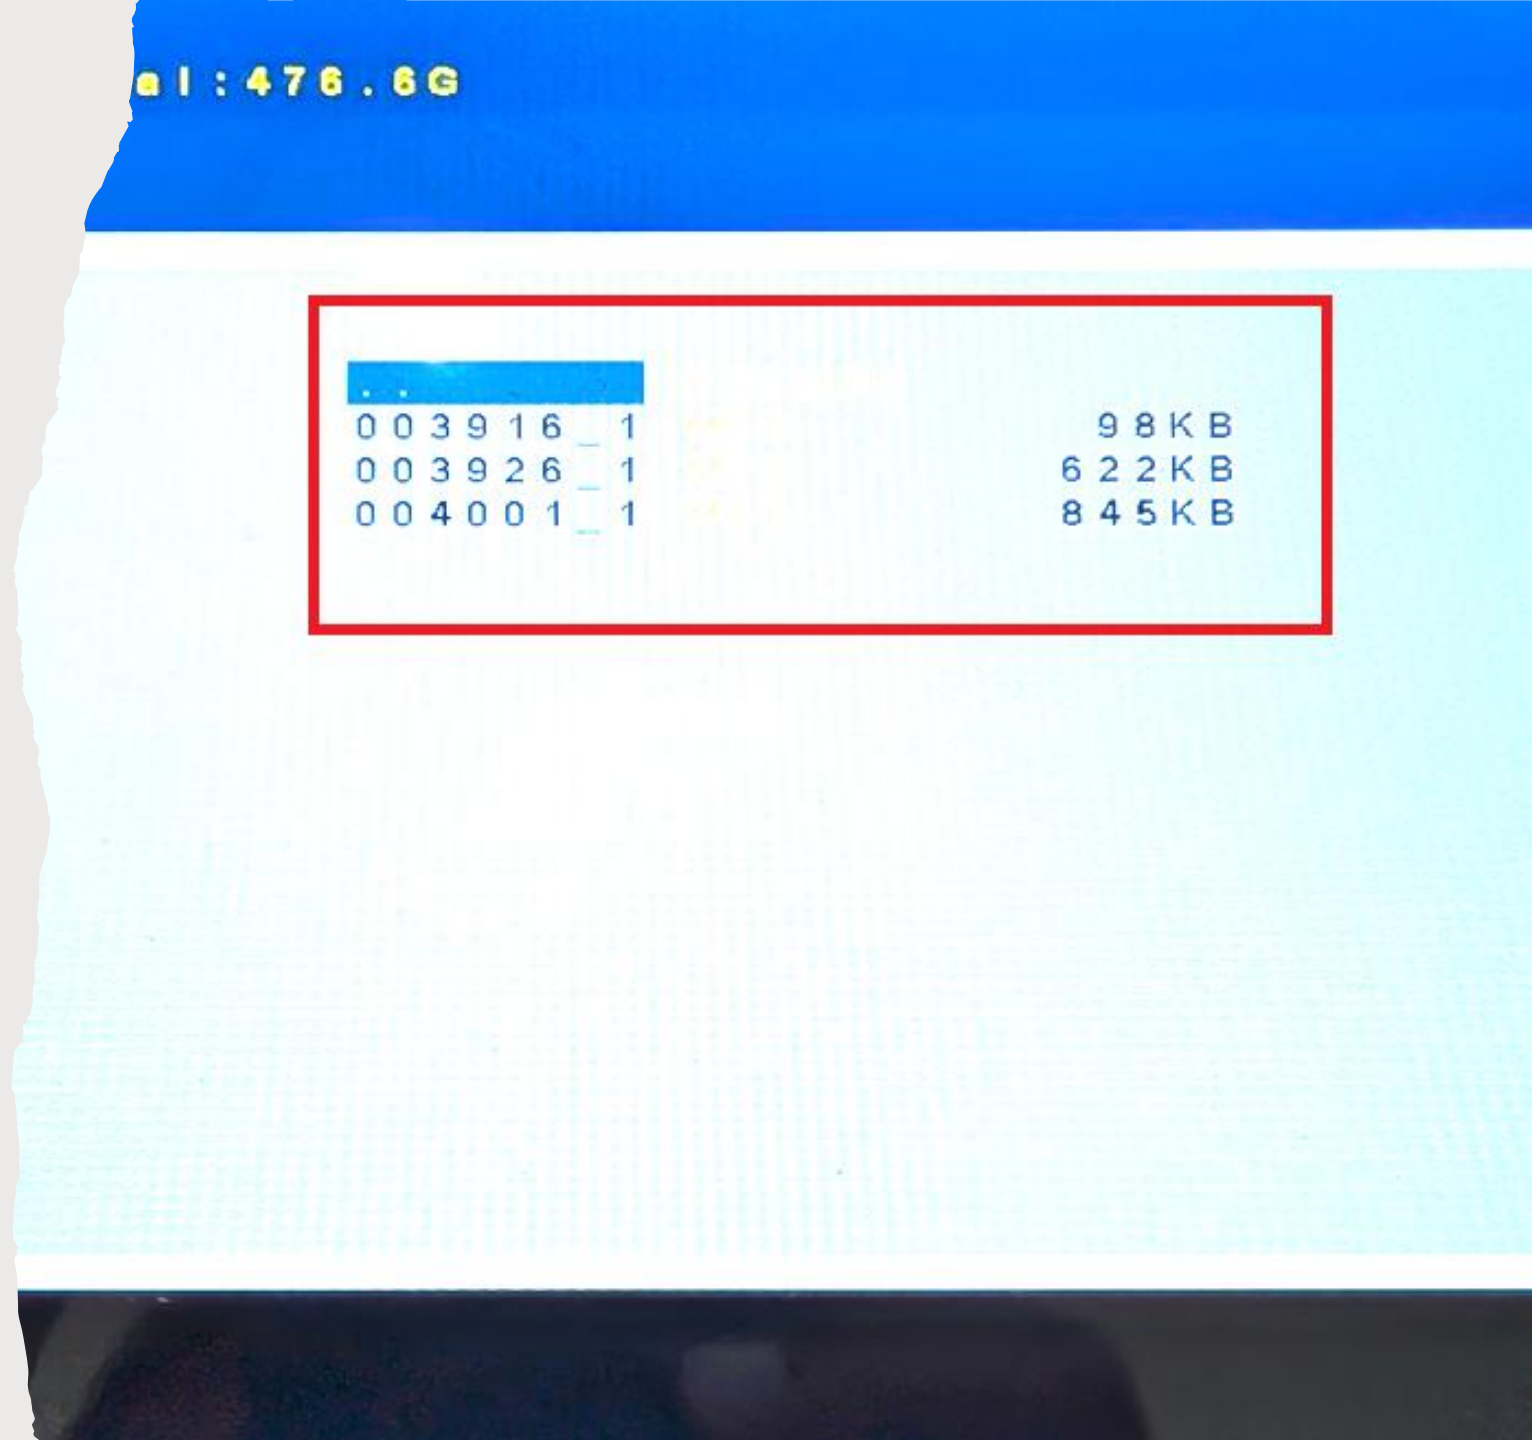

Total: 476.6G

Select a clip

Press enter

003916	1	98KB
003926	1	622KB
004001	1	845KB

Video clip will start playing back.

- Top will display a time stamp





Call 1-800-578-1853