

# MIP-4104

## 4 MP H.265 IP PTZ CAMERA




### Features

- 4 Megapixel Mini PTZ
- H.265+ / H.265 / H.264+ / H.264
- 4X Optical Zoom /
- Built-in Micro SD Slot
- IP 67 ingress Protection

### More Features

- H.265+ / H.265 / H.264+ / H.264 / MJPEG coding
- Max. Resolution 4MP ( 2560x1440 )
- 3D DNR, WDR, HLC, BLC, smart IR, etc.
- Built-in micro SD card slot, up to 256GB
- IP 67 ingress protection
- Support TRIPLE streams
- Support remote monitoring via smart phones & tablet PCs with iOS and Android OS
- ICR auto switch, true day / night vision

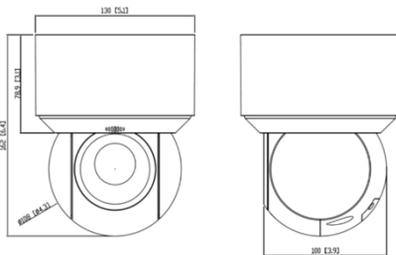

Specification	MIP-4104
Image Sensor	1 / 2.7" Progressive Scan CMOS with BSI and NIR technology
Image Size	(2560 x 1440)
Shutter Speed	50Hz: 1/25s-1/25,000s / 60Hz: 1/30S-1/30,000s
White Balance	AUTO / Manual / Indoor / Outdoor
Lens	2.8-12mm (4x Optical)
Focus	AUTO /Manual
Lens Mount	Motorized
Day & Night	ICR
Zoom Speed	About 1.6seconds (wide >tele)
BLC	Support
HLC	Support
Digital NR	Support
Angle Adjustment	Pan: 0-355 / Tilt -5-90
Video Compression	Main Stream H.265+, H.265, H.264+, H.264 Sub Stream & Third H.265+, H.265, H.264+, H.264, MJPEG
H.265 Compression Standard	Main Profile @ Level 4.1 High Tier
Resolution	4MP (2560x1440)
Main Stream	(2560x1440) (2048x1536) (1920x1080) 25fps
Sub Stream	(704x576) ( 640x480) (352x280) 30fps
Bit Rate	64Kbps- 16 Mbps
Bit Rate Type	VBR/ CBR
Network	RJ45
Audio	1 Ch audio input / 1 Ch built-mic
Storage	Built-in Miro SD slot Up to 256GB
Power Supply	DC 12V / PoE +
Power Consumption	< 14.9W
Operating Temp	- 40 °C ~ 55 C (-40 °F ~ 131°F);Humidity: less than 95 %
Dimension	130mm x 162mm / 5.1in x 6.4in
Certificate	CE, FCC
Weigh	Approx 1.2KG / 2.64 Lbs